


**Fixed Multiple Spindle Adaptor 固定式鑽孔攻牙多軸器**



**Adjustable Multiple Spindle Adaptor 活動式鑽孔攻牙多軸器**

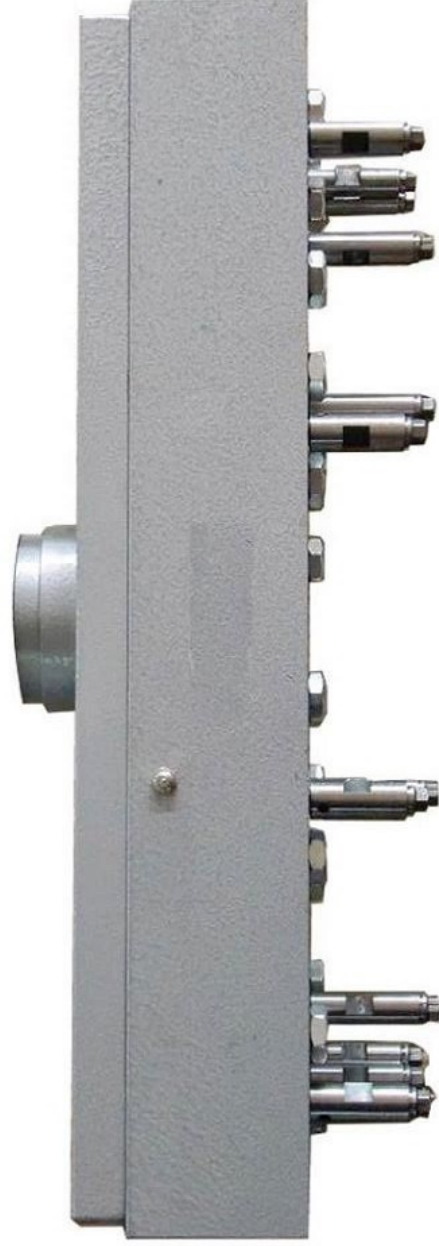

**兩軸可調式T型.A型 T.A-Type 2 Spindle Adjustable**

型式 Model	筒夾規格 Collet	最大鑽孔能力(mm) Max. Drilling Capacity	最大軸心範圍 Max. Range of Centers	最小距離(二軸間) Lowest Distance	軸數 Spindle
HT-71	ND-1 NT-1	3	71	10	2
HT-74	C-5	4	74	12	2
HT-108	C-6 JT1	6	108	18	2
HNT-108	C-6	6	108	18	2
HT-121	C-9 JT1	8	121	24	2
HT-121S	C-12	10	121	27	2
HNT-121S	C-9 C-12	8 10	121	27	2
HA-100(HA-116)	C-6	6	100	18	2~4
HA-124	C-9 JT1	8	124	26	2~4
HA-124S	C-12 JT2	11	124	28	2~4

## U形圓形多軸 U-Type Round Multi-Spindle

\* 規格表 Specification

型式 Model	筒夾規格 Collet	最大鑽孔能力(mm) Max. Drilling Capacity	最大軸心範圍 Max. Range of Centers	最小距離(二軸間) Lowest Distance	軸數 Spindle
HU-120	C-6 C-9	6 8	120	18 26	2~6
HU-120S	C-5	5	120	13	2~6
HU-165	C-6 C-9 (JT1)	6 8	165	18 26	2~10
HU-165S	C-12 (JT2) (JT6)	11	165	28	4~12
HU-200	C-6 C-9 (JT1)	6 8	200	18 26	4~12
HU-200S	C-12 (JT2) (JT6)	11	200	30	4~12
HU-250	C-6 C-9 (JT1)	6 8	250	18 26	4~12
HU-250S	C-12 (JT2) (JT6)	11	250	30	4~12
HU-300	C-6 C-9 (JT1)	6 8	300	18 26	4~14
HU-300S	C-12 (JT2) (JT6)	11	300	30	4~14

## U形方形多軸 U-Type Square Multi-Spindle

\* 規格表 Specification

型式 Model	筒夾規格 Collet	最大鑽孔能力(mm) Max. Drilling Capacity	最大軸心範圍 Max. Range of Centers	最小距離(二軸間) Lowest Distance	軸數 Spindle
HU-100*165	C-6 C-9 JT1	6 8	100*165	18 26	3~8
HU-100*165S	C-5 C-12 JT2 JT6	5 11	100*165	13 30	3~8
HU-120*200	C-6 C-9 JT1	6 8	120*200	18 26	4~12
HU-120*200S	C-5 C-12 JT2 JT6	5 11	120*200	13 30	4~12
HU-120*300	C-6 C-9 JT1	6 8	120*300	18 26	6~14
HU-120*300S	C-5 C-12 JT2 JT6	5 11	120*300	13 30	6~14
HU-170*300	C-6 C-9 JT1	6 8	170*300	18 26	6~14
HU-170*300S	C-5 C-12 JT2 JT6	5 11	170*300	13 30	6~14
HU-170*490	C-6 C-9 JT1	6 8	170*490	18 30	6~14
HU-170*490S	C-5 C-12 JT2 JT6	5 11	170*490	13 30	6~14
HU-220*380	C-6 C-9 JT1	6 8	220*380	18 30	6~14
HU-220*380S	C-5 C-12 JT2 JT6	5 11	220*380	13 30	6~14
HU-270*330	C-6 C-9 JT1	6 8	270*330	18 30	6~14
HU-270*330S	C-5 C-12 JT2 JT6	5 11	270*330	13 30	6~14
HU-270*480	C-6 C-9 JT1	6 8	270*480	18 30	6~14
HU-270*480S	C-5 C-12 JT2 JT6	5 11	270*480	13 30	6~14
HU-510*630	C-6 C-9 JT1	6 8	510*630	18 30	依客人
HU-510*630S	C-5 C-12 JT2 JT6	5 11	510*630	13 30	依客人